

**Silhouette**<sup>®</sup>  
 ICONIC EYEWEAR MADE IN AUSTRIA. SINCE 1964.

SUN 2019  
 Mod. 8164



ACCENT SHADES

ACCENT SHADES / Mod. 8164

**SPARE PARTS**  
 ERSATZTEILE / PIÈCES DE RECHANGE


Boxing System / Kastensystem / Système de castes



Metallfassung aus High-Tech Titan  
 Gläser: Polycarbonat  
 Wölbung: Base 6  
 100 % UV A-, B-, C-Schutz

Metal frame made of High-Tech Titanium  
 Lenses: polycarbonate  
 Curving: base 6  
 100 % UV A-, B-, C-protection

Monture en métal en High-Tech Titanium  
 Verres: polycarbonate  
 Courbure: base 6  
 Protection de 100 % de UV A, B, C

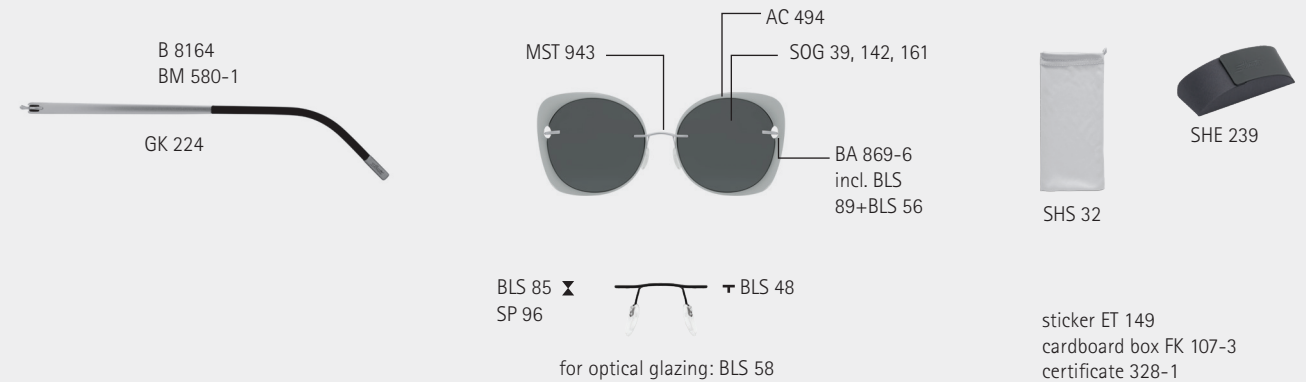


für optische Verglasung / for optical glazing / pour le montage des verres correcteurs

technische Änderungen und Druckfehler vorbehalten  
 specifications are subject to change without notice, no liability will be assumed for misprints  
 sous réserve de modifications techniques et d'erreurs d'impression

[www.silhouette.com](http://www.silhouette.com)

**Col. / 75-3530**  
 GLOSSY CARAMEL  
 metal parts: rose gold silky matte  
 decoration ring: milky nude  
 hinge disc: red brown  
 temple ends: salmon  
 temple tips: rose gold matte

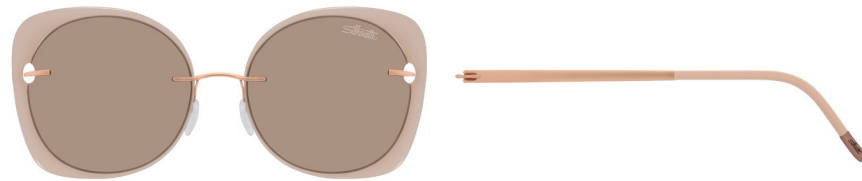


**Col. / 75-4040**  
 MINT-ROSÉ MIRROR  
 metal parts: violet shiny  
 decoration ring: aubergine  
 hinge disc: aubergine  
 temple ends: dark violet  
 temple tips: silver shiny




**Col. / 75-6500**  
 POL GREY  
 metal parts: rhodium silky matte  
 decoration ring: milky light grey  
 hinge disc: grey  
 temple ends: black  
 temple tips: silver matte



**Col. / 75-8530**  
 GLOSSY GOLD MIRROR  
 metal parts: gold silky matte  
 decoration ring: milky ivory  
 hinge disc: white  
 temple ends: white  
 temple tips: gold matte

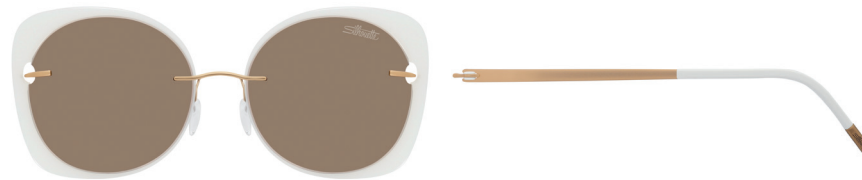

## SILHOUETTE LIGHT MANAGEMENT

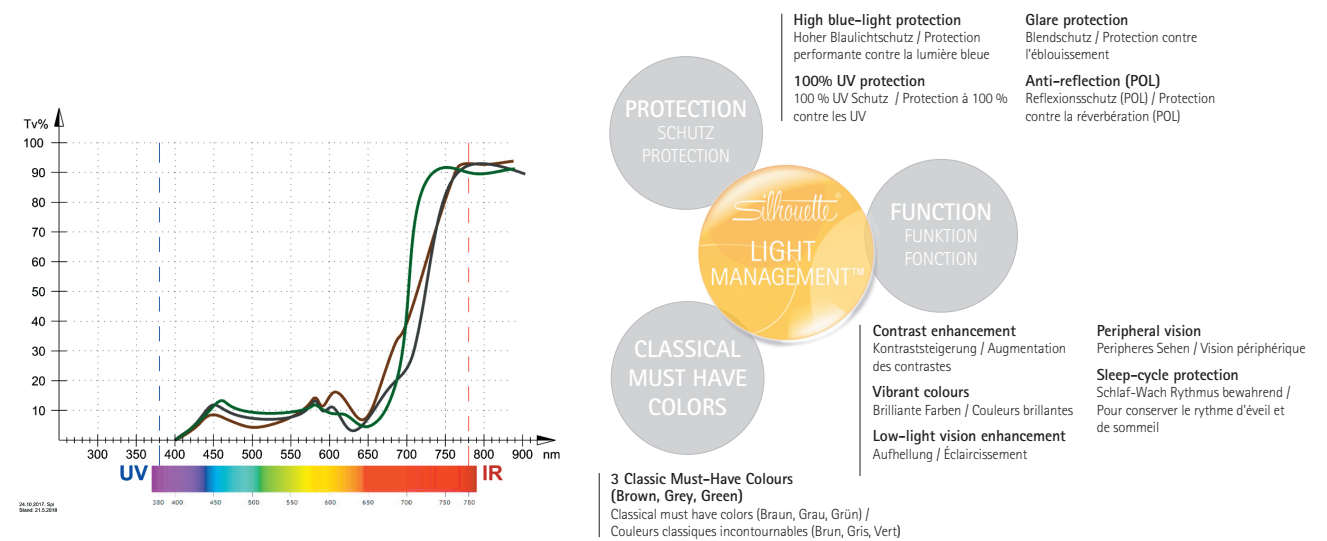

## IN-LINE GLAZING

### Milling of optical lenses with nylon-groove


Groove-depth:	0,8 mm
Groove-width:	0,7 mm
Basis curve frame:	5B
Basis curve lens:	4-6 B
Minimum thickness of lens rim:	1,8 - 2,0 mm

### Optische Linse mit Nylon-Nut schleifen

Nuttiefe:	0,5 mm
Nutbreite:	0,7 mm
Basiskurve Fassung:	5B
Basiskurve Linse:	4-6 B
Minimale Glasranddicke:	1,8 - 2,0 mm

### Taillage des verres optiques avec rainure nylon


Profondeur de rainure:	0,5 mm
Largeur de rainure:	0,7 mm
Courbure de base de la monture:	5B
Courbure de base du verre:	4-6 B
Verre:	1,8 - 2,0 mm

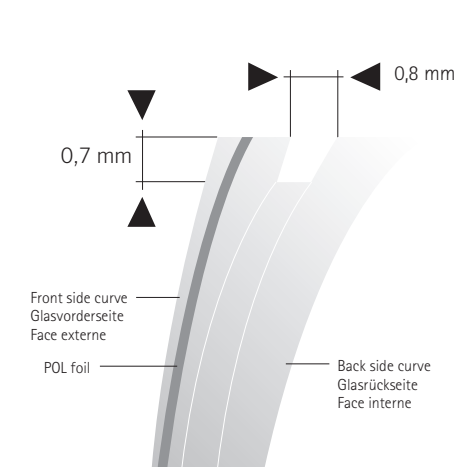

**ATTENTION:** due to minimalist diameters of front frame do not heat under any circumstances!

**ACHTUNG:** wegen der minimalistischen Querschnitte des Brillenrahmens auf keinen Fall erwärmen!

**ATTENTION:** en raison du contour mince, ne jamais chauffer la monture!

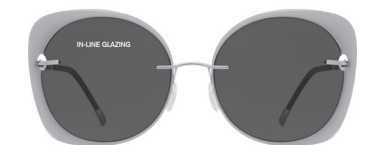

Transfer shape only via formers or OMA-files!  
 Scheibenform ausschließlich mit Formscheiben oder OMA-Daten übertragbar!  
 Transfer de la forme uniquement en utilisant le gabarit ou le dossier OMA!